

Assigning Custom User Data to Hidden Value

```
if(count(instance('commcaresession')/session/user/data/FacilityID) > 0,  
instance('commcaresession')/session/user/data/FacilityID, 'Unknown ID')
```

Figure 1:

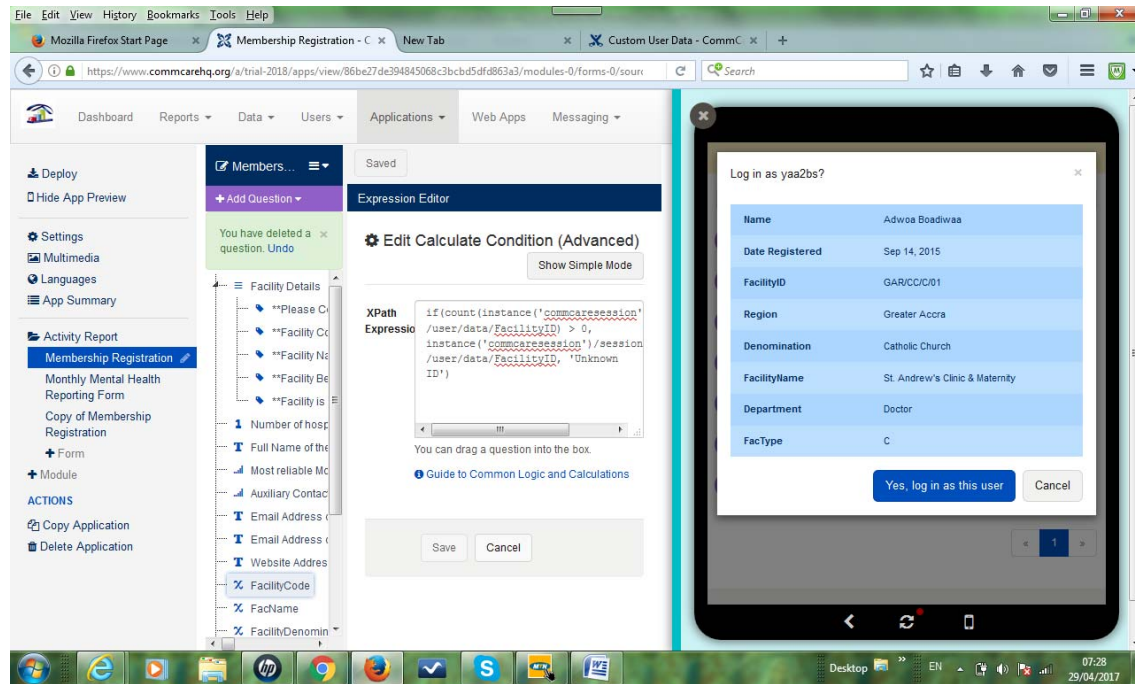


Figure 2

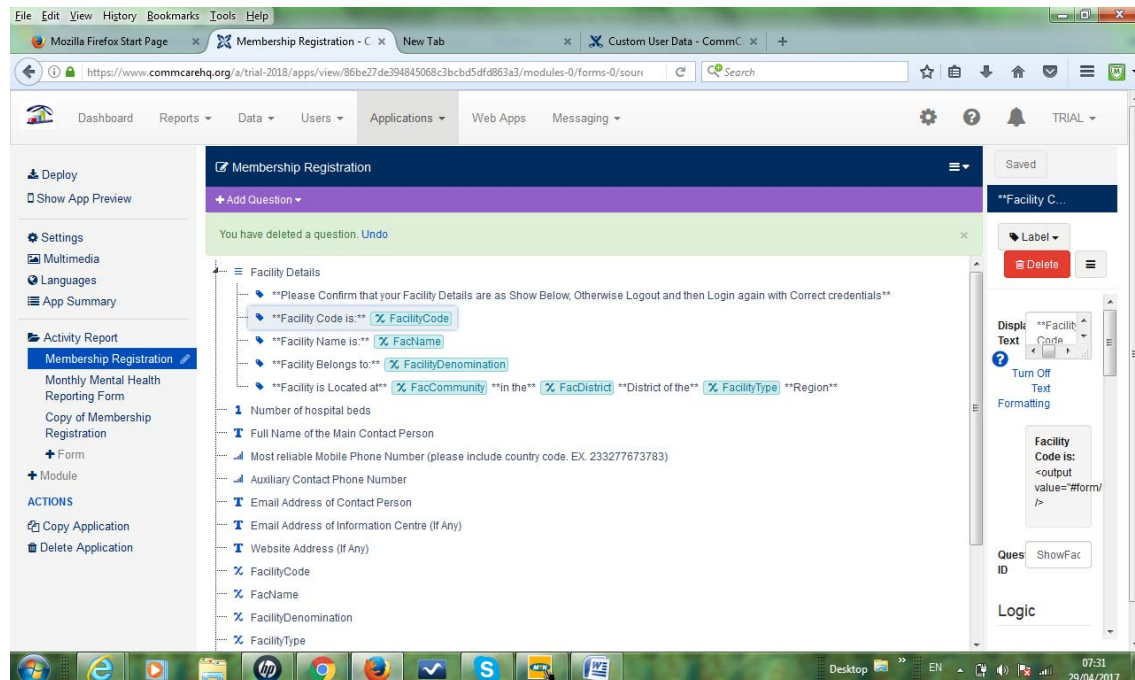


Figure 3

